

Siddons Striker Printer Starter Guide


Printer Contents

The Siddons Striker III Reminder Sticker Printing System includes:

1. Striker Printer
2. Striker Key Pad
3. DC Power Supply
4. AC Power Cord
5. Label Spindle with 2 Guides
6. Two (2) Striker Ink Spindles with one (1) take-up core



Printer Rear Component Diagram

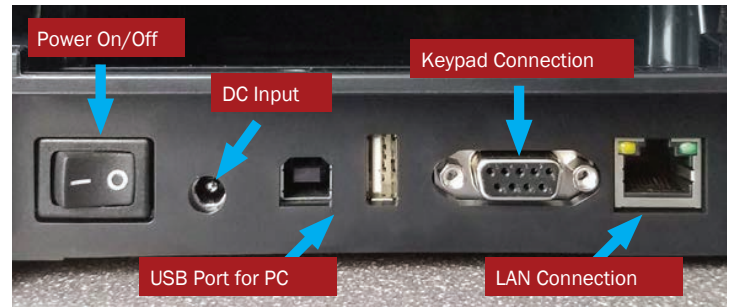

Loading Striker Ink Rolls



1 TURN OFF printer; open cover by pressing in on round Green tabs on either side of printer.



2 Release the ink carriage by gently pulling up on the green lever.



3 Load rear spindle with ink ribbon, from left to right; make sure collared end of spindle is on the right.



4 Load take-up spindle, from left to right; make sure collared end of spindle is on the right.



5 Feed ribbon, back to front, under the print head, taping securely to the take-up spindle. Dull side of ribbon will show.



6 Make sure spindle positions are as shown with larger, collared end on the right.

Loading Striker Labels




1 Load the Reminder Stickers onto the spindle, making sure the guides are centered.



2 Slide the roll of stickers onto the sticker spindle; lineup spindle guides with spindle slots and place in printer.



3 Guide the stickers through the printer, under and through the centered green guides.

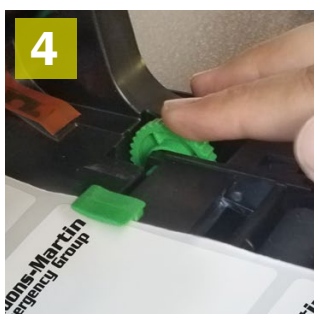

4 Make sure the stickers travel under the green print sensor.



5 Gently pull the stickers through the printer so at least one is coming out of the printer.



6 Press ink carriage down, back into printer, close printer cover—you're ready to start printing!

NOTE: Make sure both sides of the ink carriage are latched. Always have the Striker Printer cover closed when powering on.

Siddons Striker Printer Starter Guide


NOTE: We highly recommend to plug your Striker Printer into a SURGE PROTECTOR (Not a power strip) to help protect your print system from power surges and possibly voiding your warranty.



Make sure power is OFF and connect the Striker Keypad to the back of the Striker Printer as shown above.



Connect the DC cord to the back of the Striker Printer, then connect the power cord to the DC convertor.

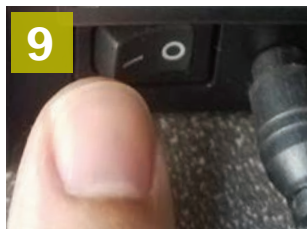

Power ON your Striker Printer with the toggle switch located on the rear. If a printer restart is necessary, wait 10 seconds.

Keypad Navigation and Templates

When your Siddons Striker Printer is powered on, the first keypad prompt will read as follows... "FORM" = SELECT LABELS". now press the FORM key to see your template menu. Use the arrow keys on the keypad to easily navigate through the available templates and press ENTER to select. Listed below you can see the order of navigation of the keypad prompts to help guide you through the your templates and customized settings. If at any point, you wish to exit from a current template, simply press ALT + EXIT to return to the main prompt. If you need to see a visual samples of the templates, you can find them numbered and listed here. ----->

To view template menu, press the FORM key.
Press ENTER key to select your template.



Use the UP and DOWN arrows to navigate between templates.



To exit from existing template, press the ALT + EXIT keys.



A. "FORM" = SELECT LABELS

1. PM _ OIL
↑↓ TO MOVE LIST

1a. PM ENGINE OIL HOURS:
550 _

2. AIR _ FILTER
↑↓ TO MOVE LIST

1b. PM ENGINE OIL DATE:
12/08/2022 _

3. FUEL _ FILTER
↑↓ TO MOVE LIST

4. PUMP _ TEST
↑↓ TO MOVE LIST


4a. PUMP TEST DATE:
12/08/2022 _

5. AERIAL _ MNT
↑↓ TO MOVE LIST

B. SETTINGS
↑↓ TO MOVE LIST


C. SET _ DATE
↑↓ TO MOVE LIST

Siddons Striker Templates Samples

1)  **Siddons-Martin
Emergency Group**


NEXT SERVICE DUE
P.M./ENGINE OIL

HOURS:	550
DATE:	12/08/2023

2)  **Siddons-Martin
Emergency Group**


NEXT SERVICE DUE
AIR FILTER

HOURS:	600
DATE:	12/08/2023

3)  **Siddons-Martin
Emergency Group**


NEXT SERVICE DUE
FUEL FILTER

HOURS:	500
DATE:	12/08/2023

4)  **Siddons-Martin
Emergency Group**

NEXT SERVICE DUE
PUMP TEST

DATE:	12/08/2023
-------	------------

5)  **Siddons-Martin
Emergency Group**

NEXT SERVICE DUE
AERIAL MAINTENANCE

HOURS:	600
DATE:	12/08/2022

**Do you need a bit more help with your printer?
877-219-3222 - www.cobrasystems.com/support**